



REV	DESCRIPTION	DATE
1		

NOTE:
1.CARD INSERTION SPECIFICATION
A. CARD INSERTION DEPTH:31.1 MM.
B. CARD THICKNESS=0.7-0.8 MM.
2.READING CONTACT:
POSITION:ACCORDING TO
ISO 07816-2 C1-C8.
CONTACT FORCE:30-50 GRAM.
3.MATERIAL AND FINISH:
A. HOUSING: LCP UL 94-V0 COLOR: BLACK.
B. CONTACT:PHOSPHOR BRONZE,SELECTIVE PLATING AU
OVER 50u" IN MIN UNDERPLAT SN ONLY ON TAIL ZONE.
C. SWITCH:PHOSPHOR BRONZE,SELECTIVE PLATING AU
OVER 50u" IN MIN UNDERPLAT SN ONLY ON TAIL ZONE.

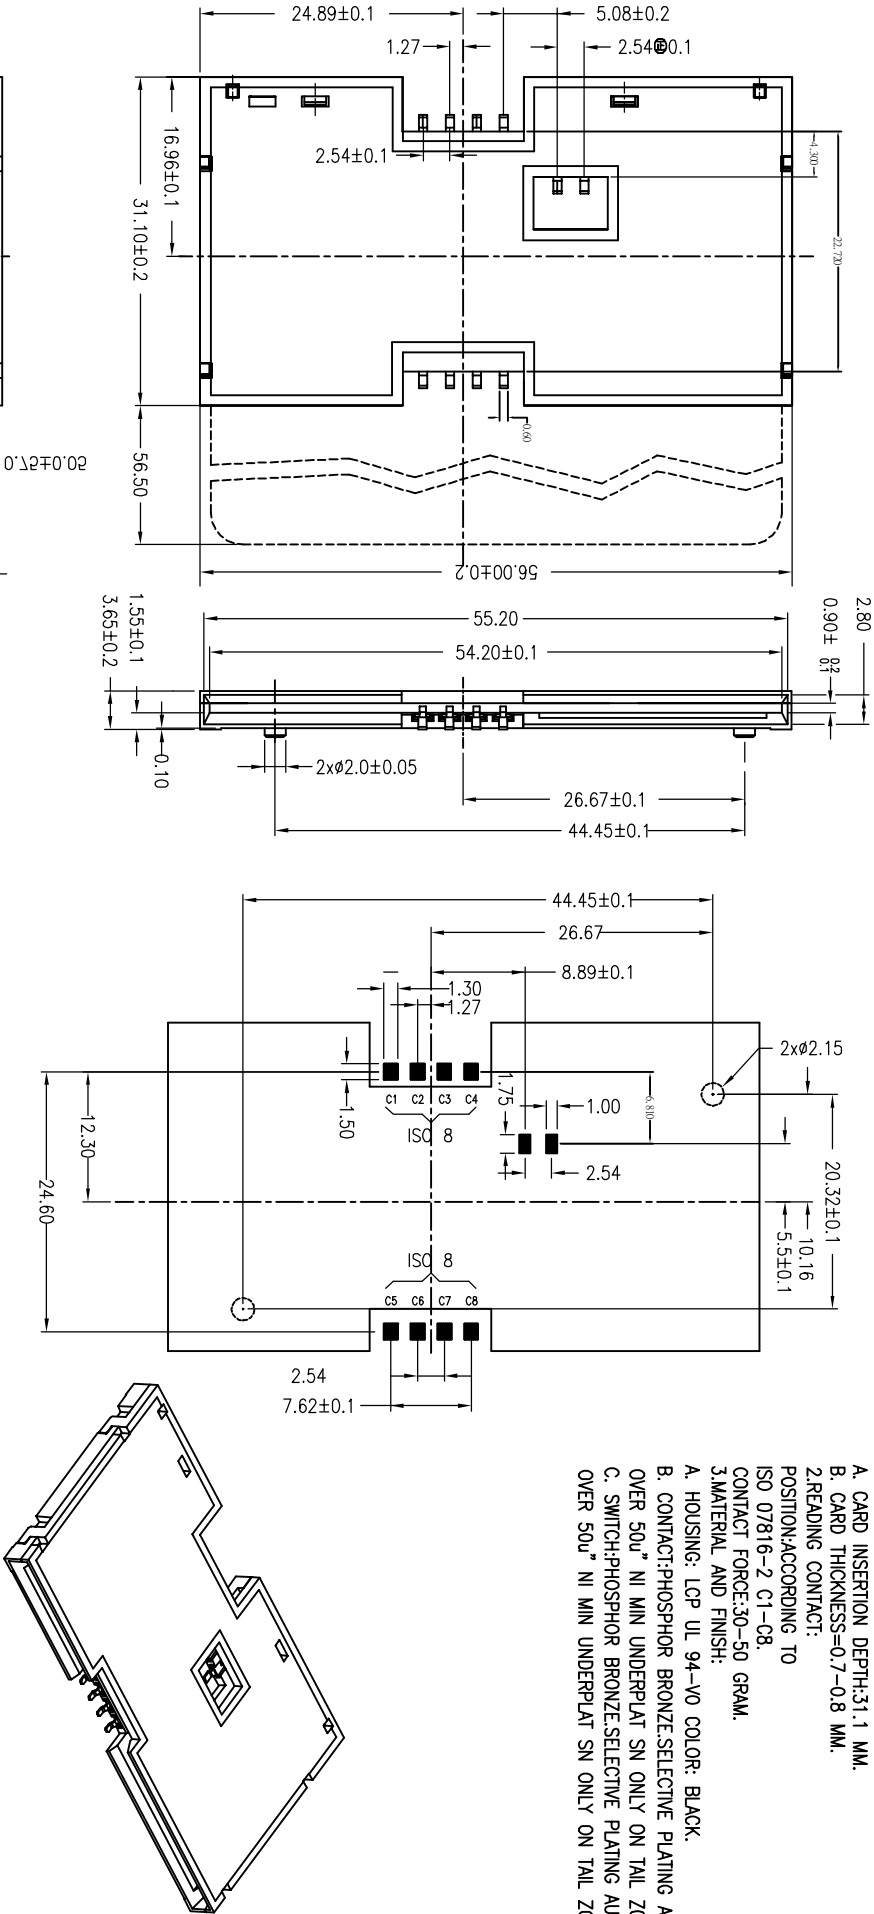

TOLERANCE		MATERIAL	UNITS	SCALE	DATE	DRAWN NAME:		DWG NO.
X	±0.25	X'	± 2'	mm	1 / 1	20110922	??SMART CARD	JK0080628L20
.XX	±0.15	.XX'	± 1'	APPROVAL	CHECKED	PROL	(SHORT SMT TYPE)	PART NO.
.XXX	±0.10			zhongbin	zhongbin			

东莞市汉硕电子科技有限公司