
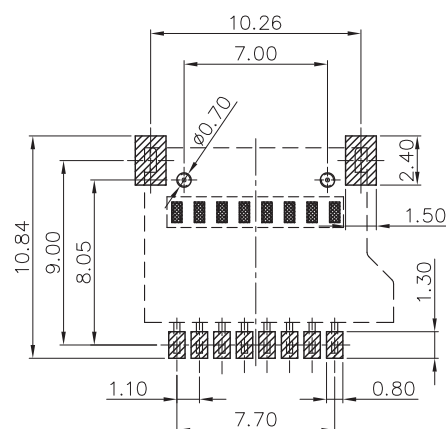
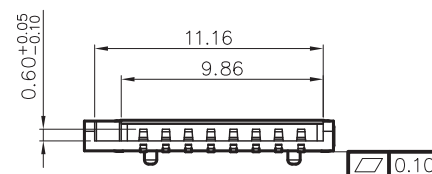

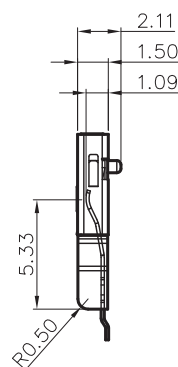
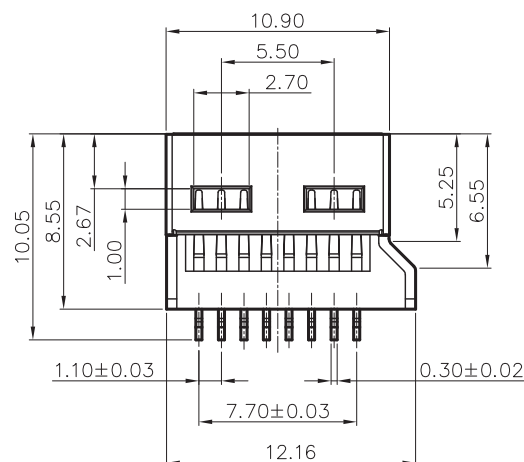


由 Autodesk 教育版产品制作


由 Autodesk 教育版产品制作

REV.	DESCRIPTION	DATE
A	RELEASE	Jul 01, 2012



RECOMMEND PCB LAYOUT
TOLERANCE: ± 0.05
TOP VIEW

PCB AREA
CONNECT AREA
KEEP OUT AREA

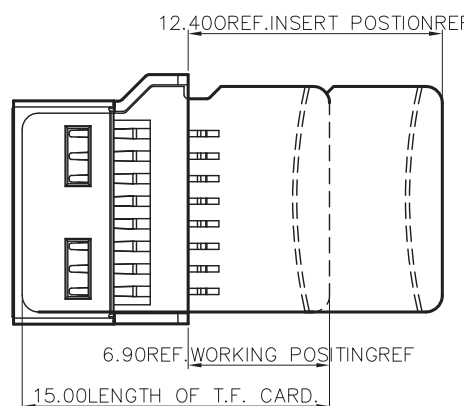

MATERIALS

- HOUSING : THERMOPLASTIC (UL 94V-0).
- TERMINAL : COPPER ALLOY,
PLATING : PLATING SEE TABLE.
- SHELL : STAINLESS STEEL.
PLATING : NICKEL PLATED.

SPECIFICATION

- CURRENT RATING : 0.5 A. MAX.
- DIELECTRIC WITHSTANDING VOLTAGE :
100V AC R.M.S. FOR 1 MINUTE.
- INSULATION RESISTANCE : 1000M Ω MIN.AT 100V DC.
- CONTACT RESISTANCE : 50m Ω MAX.
- OPERATING TEMPERATURE : -30°C TO +80°C.

PART NUMBER INFORMATION :

5101108-X1005S-X
SERIES CODE
SMT 90°
T-FLASH
SINGLE TYPE
NUMBER OF POSITIONS
R: RoHS
H: HALOGEN FREE
FOLLOW NUMBER
W/O PUSH
INSERT TYPE
PLATING SEE TABLE

DESCRIPTION OF PLATING ON TERMINALS			
NO.	EXPLAIN	NO.	EXPLAIN
0	GOLD FLASH	3	GOLD 15u"
1	GOLD 5u"	4	GOLD 20u"
2	GOLD 10u"	6	GOLD 30u"
TOLERANCE .0=±0.25 .00=±0.15 .000=±0.05 ANG.=±3°		DRAWER CHECK APP'D PRODUCT SPEC.	
UNITS : mm		DRAW NO.	
SCALE NONE	SIZE A7	SHEET 1 OF 1	REV. A
R5101108-X1005S-X			

汉硕电子科技有限公司

NAME
T-FLASH CARD 8PIN SMT 90°

DRAW NO.
R5101108-X1005S-X